



ES SERIES 50-60 HZ

5" STAINLESS STEEL CLOSE-COUPLED
SUBMERSIBLE MULTISTAGE ELECTRIC PUMPS



INDEX

5" Stainless steel close-coupled submersible multistage electric pumps	2
Family curves.....	3
Electric pump identification code	4
Tables of hydraulic performance	5
ES 3-5 at 50 Hz.....	5
ES 3-5 at 60 Hz.....	5
Spare parts and materials.....	6
Technical data and performance curves at 50 Hz.....	7
ES 3	8
ES 5	10
Technical data and performance curves at 60 Hz	13
ES 3	14
ES 5	16

NOTE: Franklin Electric S.r.l. reserves the right to amend specification without prior notice

For the most up-to-date product information, visit franklinwater.eu.



5" STAINLESS STEEL CLOSE-COUPLED SUBMERSIBLE MULTISTAGE ELECTRIC PUMPS

APPLICATION

- Water distribution / Pressure boosting
- Rainwater recovery
- Irrigation / Gardening / Sprinklers
- Dewatering
- Wash down unit
- Other various installations

FEATURES

- Easy installation: the single-phase version have internal capacitor and thermic motor-protection thus is not necessary to connect the electric pump to a control panel
- Compact close-coupled design, robust and corrosion resistant
- Plug-in type power cable and level control (floater) for easy replacement
- Heavy duty over size motor shaft
- Stainless steel water proof capsule to protect the motor
- Motor cooling is guaranteed by the pumped liquid
- Double mechanical seal separated by an oil chamber* for maximum motor protection

*In compliance with FDA - Food, Drug Administration - and the annex to G.U. no. 104 of 20/04/73 for oils in contact with food stuffs

PUMP SPECIFICATIONS

- Flow:
 - up to 7.5 m³/h at 50 Hz
 - up to 9 m³/h at 60 Hz
- Head:
 - up to 88 m at 50 Hz
 - up to 80.5 m at 60 Hz
- Discharge outlet: 1"¼ Rp or NPT
- Maximum working pressure: 10 Bar
- Maximum immersion depth: 20 m
- Maximum allowable amount of sand: 50 gr/m³
- Maximum solids size: up to 2 mm
- Liquid temperature range: -5 °C to + 40 °C
- Continuous operation either in vertical or horizontal position
- 20 m of power cable type H07RN F is supplied with the standard version
- Available in two single-phase versions:
 - with float switch
 - without float switch
- The hydraulic characteristics are guaranteed, according to ISO standard 9906:2012, grade 3B

MOTOR SPECIFICATIONS


- Single-phase or three-phase motor
- Asynchronous
- Protection degree: IP68
- Insulation class: F
- Standard voltage:
 - Single-phase: 220-240 V ± 5 % at 50 Hz
220-230V ± 5 % at 60 Hz
(thermal protection built into the motor up to 1.1 kW)

- Three-phase: 220-240 V $\pm$ 5 % and 380-415 V $\pm$ 5 % at 50 Hz
220-230V $\pm$ 5 % and 380-400V $\pm$ 5% at 60 Hz
(thermal protection to be provided into the starter panel by the Installer)
- Frequency of starts: max. 60 starts/hour (with min. 1 minutes resting time)

AVAILABLE ON REQUEST

- 2" Adapter
- Different voltages and frequencies

FAMILY CURVES

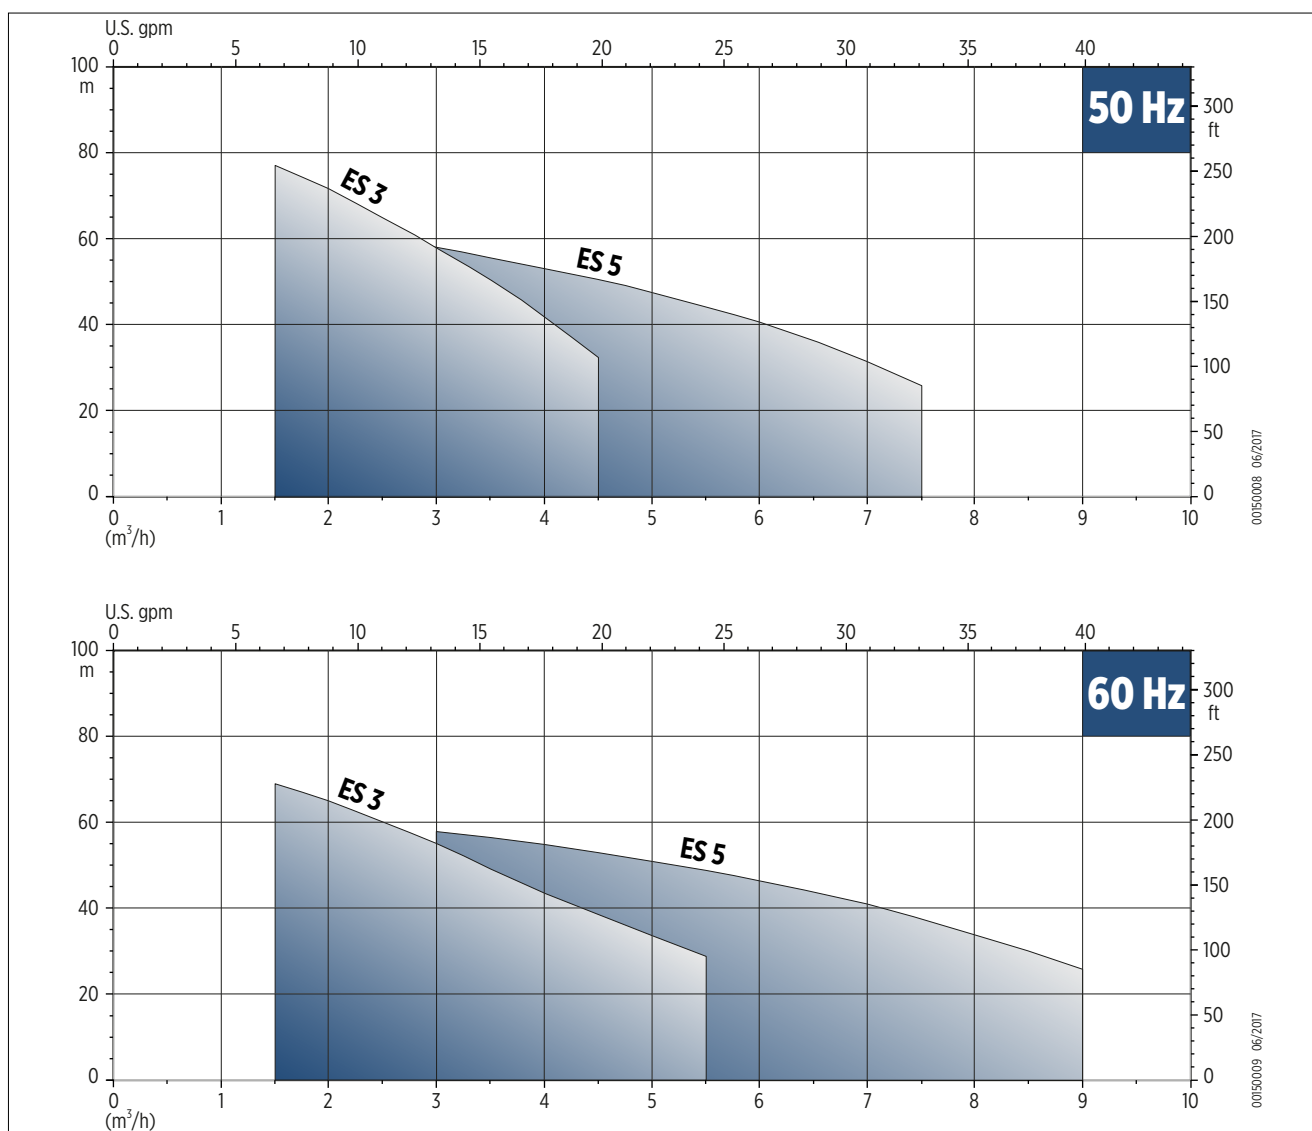

ELECTRIC PUMP IDENTIFICATION CODE

0140005 EN 06/2019

TABLES OF HYDRAULIC PERFORMANCE

ES 3-5 AT 50 HZ

Electric pump model	RATED POWER		Q = DELIVERY												
			l/min 0	25.0	33.3	42	50.0	58.3	67	75.0	83.3	92	100.0	116.7	125
			m³/h 0	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	7	7.5
			US GPM 0	6.6	8.8	11.0	13.2	15	17.6	19.8	22.0	24.2	26	30.8	33
	[kW]	[HP]	H = HEAD METERS COLUMN OF WATER [m]												
ES 3/3	0.55	0.75	34	30.5	28.5	26.5	23.5	21	17.5	14					
ES 3/4	0.55	0.75	45	40	37.5	34.5	31	27	23	18					
ES 3/5	0.75	1	56	49	46	42	38	33	27.5	21.5					
ES 3/6	0.75	1	66.5	58	54	49.5	44.5	38.5	32	25					
ES 3/7	0.9	1.2	77.5	68	63.5	58	52	45	37.5	29.5					
ES 3/8	1.1	1.5	88	77	71.5	65	58	50.5	42	32.5					
ES 5/3	0.55	0.75	34.5			31	30	29	28	26.5	25	23.5	22	17.5	15
ES 5/4	0.75	1	45.5			40.5	39	38	36.5	35	33	30.5	28	22	19.5
ES 5/5	0.9	1.2	57			50.5	49	47.5	45.5	43.5	41	38	35	27.5	23
ES 5/6	1.1	1.5	68			59.5	58	55.5	53	50.5	47.5	44	40.5	31.5	26


ES 3-5 AT 60 HZ

Electric pump model	RATED POWER		Q = DELIVERY												
			l/min 0	33.3	42	50.0	58.3	67	75.0	83.3	92	100.0	116.7	133.3	150
			m³/h 0	2	2.5	3	3.5	4	4.5	5	5.5	6	7	8	9
			US GPM 0	8.8	11.0	13.2	15	17.6	19.8	22.0	24.2	26	30.8	35.2	39.6
	[kW]	[HP]	H = HEAD METERS COLUMN OF WATER [m]												
ES 3/36	0.75	1	49	43	40.5	37.5	34.5	31	27.5	23	19				
ES 3/46	0.9	1.2	65	55.5	52.5	49	44.5	40	35	29.5	24				
ES 3/56	1.1	1.5	80.5	69	65	60	55	49	43	36.5	29				
ES 5/26	0.75	1	33.5			30	29.5	28.5	28	27	26	25	22	19	15
ES 5/36	0.9	1.2	50			44	43	42	40.5	39	37.5	36	31.5	27	21
ES 5/46	1.1	1.5	65.5			58	56.5	55	53	51	49	46.5	41	34	26

SPARE PARTS AND MATERIALS

Ref. No.	Spare parts description	Material	Standard	
			ASME	DIN / EN
10.01 *	Screws and flanges for pre-loading	Stainless steel	-	UNI-EN 12165-98
10.02 *	Power cable assembly	Cable: H07RN-F Cable gland: nickel plated brass / NBR		
10.03 *	Seeger-ring	Stainless steel	AISI 304	1.4301
10.04 *	Level control assembly	Cable: H07RN-F Float switch: PP Holding cable plate: PA66 Cable gland: nickel plated brass / NBR		
10.05	Capacitor with cables and connectors	-		
10.06	Clamp for capacitor	-		
20.00 *	Outer case	Stainless steel	AISI 304	1.4301
20.01 *	Suction strainer	Stainless steel	AISI 304	1.4301
30.00 *	Motor housing and stator	Stainless steel	AISI 304	1.4301
30.01 *	Upper motor cover	Stainless steel	AISI 304	1.4301
30.02	Upper bearing housing with cover	Aluminum		
30.03 *	Lower motor cover	Stainless steel	AISI 304	1.4301
30.04	Lower bearing cover	Aluminum		
30.05 *	O-Ring	NBR		
30.06 *	Mechanical seals	Ceramic alumina / Carbon graphite / NBR		
30.07	Ball bearings	6202 2Z-C3 / 6303 2Z-C3		
30.08 *	Rotor and pump shaft	Stainless steel	AISI 304	1.4301
30.09 *	Screws, nut and washers	Stainless steel	AISI 304 AISI 316	1.4301 1.4401
40.00 *	Stage housing and diffuser	Stainless steel	AISI 304	1.4301
40.01 *	Spacer	Stainless steel	AISI 304	1.4301
40.02 *	Floating neck ring	PPS		
40.03 *	Initial stage housing	Stainless steel	AISI 304	1.4301
50.00 *	Impeller	Stainless steel	AISI 304	1.4301
50.01 *	Impeller spacers	Stainless steel	AISI 304	1.4301

* Spare parts in contact with liquid

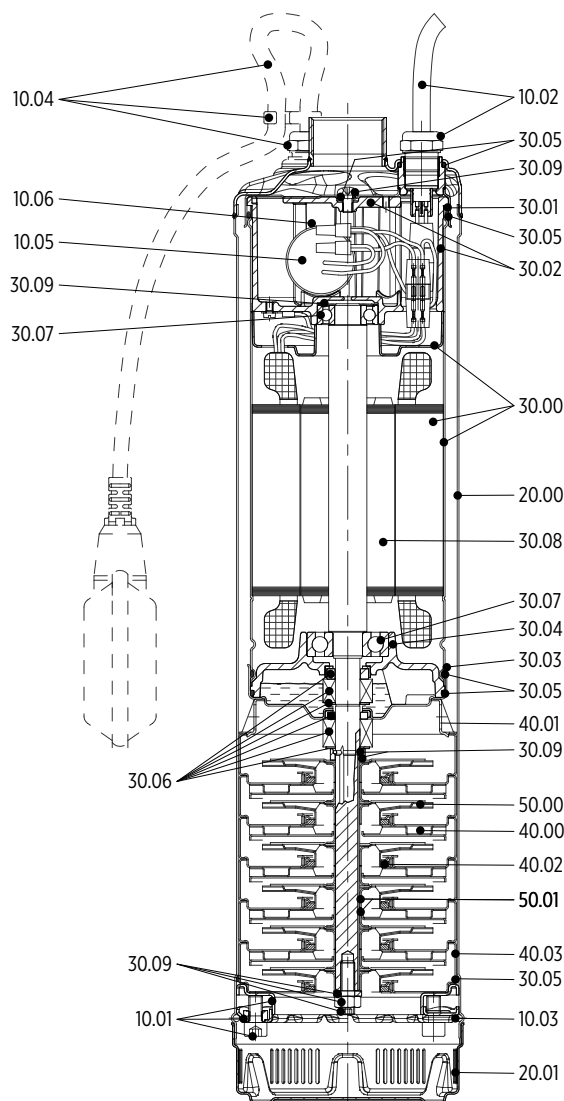

00130028 01/2018

Technical data and performance curves at 50 Hz

ES 3 - 50 HZ

TECHNICAL DATA


Electric pump model		Number of stages	MOTOR POWER		INPUT POWER	Capacitor		RATED CURRENT		
Single-phase	Three-phase		[kW]	[HP]		μF	V	Single-phase 220-240 V	Three-phase 220-240 V 380-415 V	
ES 3/3	ES 3/3T	3	0.55	0.75	0.63	16	450	3.6	3.12	1.8
ES 3/4	ES 3/4T	4	0.55	0.75	0.81	16	450	4.0	3.5	2.0
ES 3/5	ES 3/5T	5	0.75	1	0.99	20	450	4.7	3.7	2.1
ES 3/6	ES 3/6T	6	0.75	1	1.15	20	450	5.2	4.0	2.3
ES 3/7	ES 3/7T	7	0.9	1.2	1.34	30	450	6.7	4.4	2.5
ES 3/8	ES 3/8T	8	1.1	1.5	1.50	30	450	7.2	4.7	2.7

DIMENSIONS AND WEIGHTS


Electric pump			Weight* [Kg]		Packaging [mm]		
Single-phase	Three-phase	Lt [mm]	Single-phase	Three-phase	L	B	H
ES 3/3	ES 3/3T	446	12	13.3	720	230	175
ES 3/4	ES 3/4T	470	12.7	13.95	720	230	175
ES 3/5	ES 3/5T	544	14.3	14.45	720	230	175
ES 3/6	ES 3/6T	568	14.8	15	720	230	175
ES 3/7	ES 3/7T	592	17	15.45	720	230	175
ES 3/8	ES 3/8T	616	17.1	16	720	230	175

* Electric pump weight without float switch

DIMENSIONAL DRAWINGS

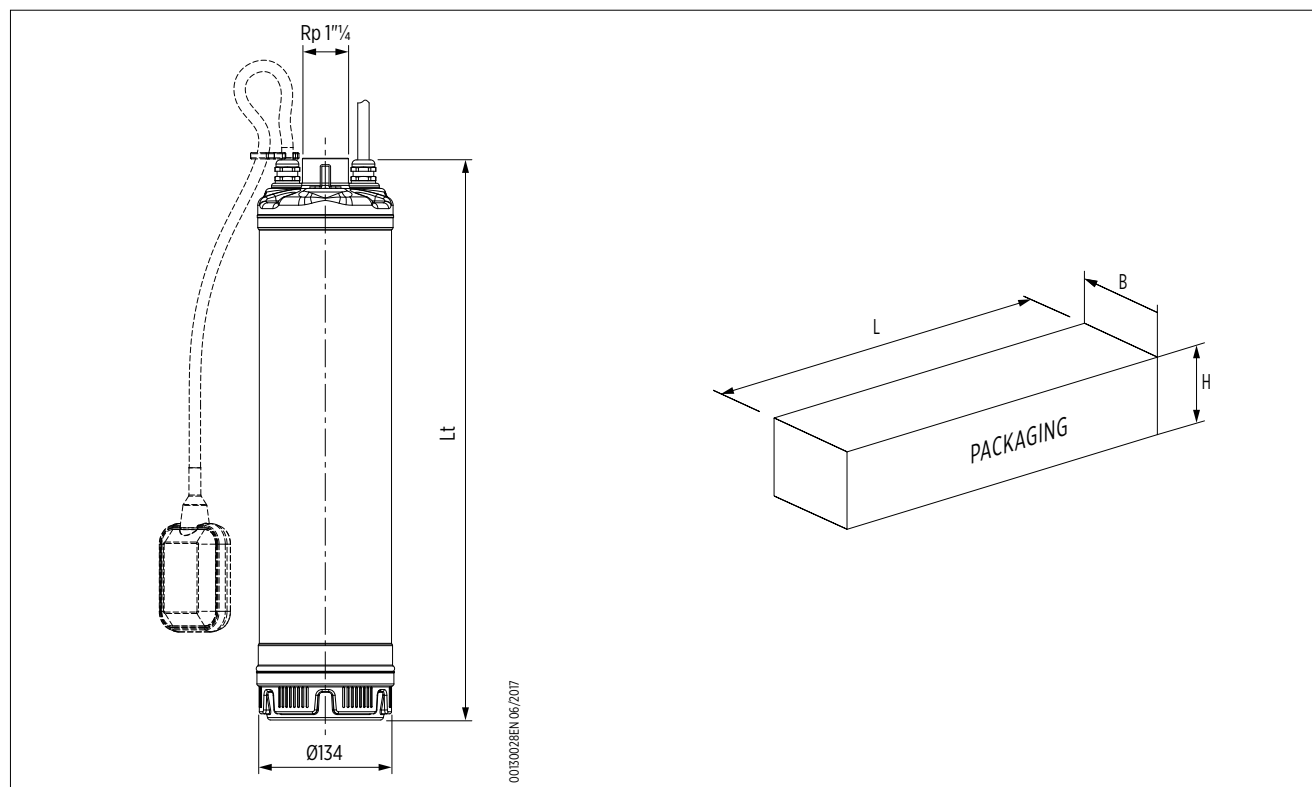

ES 3 - PERFORMANCE CURVES AT 50 HZ

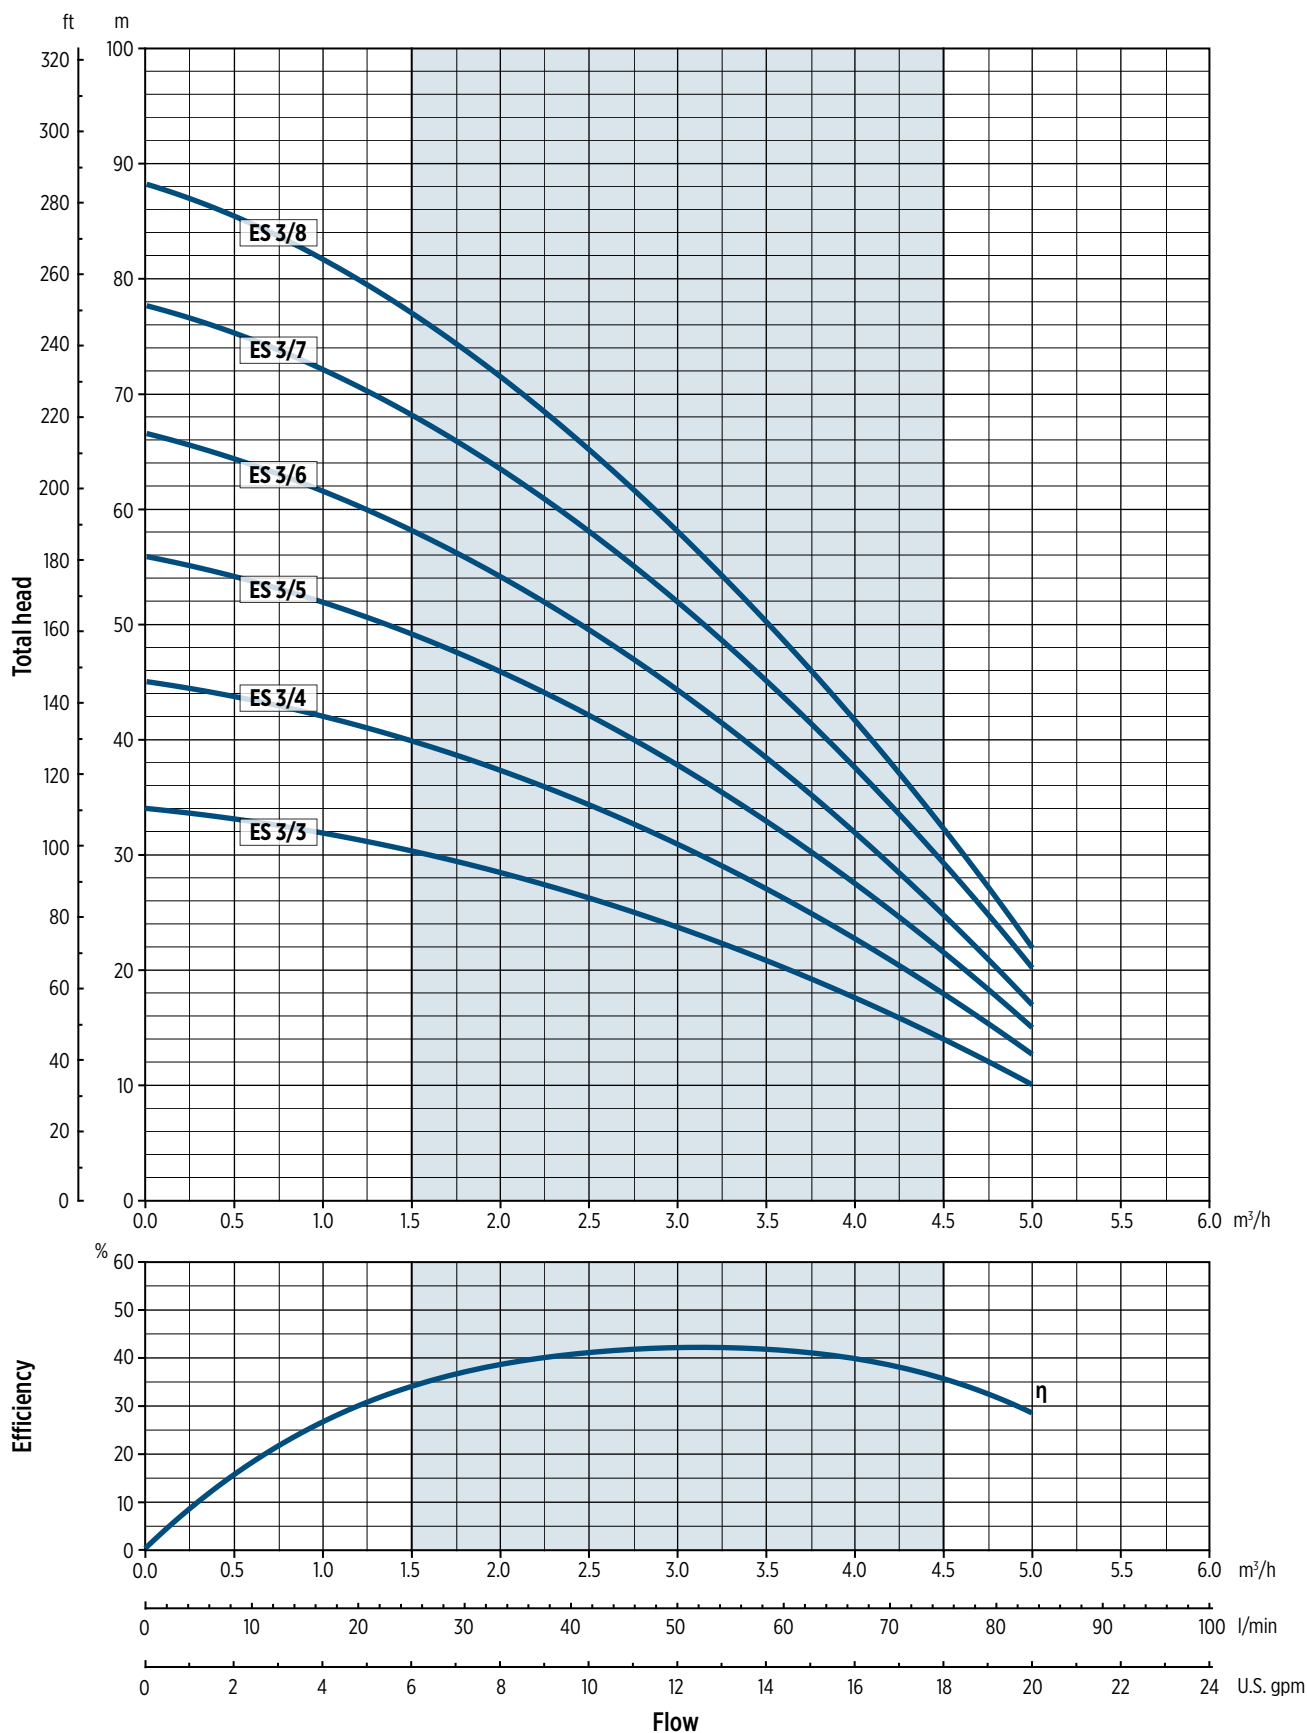

ES 5 - 50 HZ

TECHNICAL DATA


Electric pump model		Number of stages	MOTOR POWER		INPUT POWER	Capacitor		RATED CURRENT		
Single-phase	Three-phase		[kW]	[HP]		μF	V	Single-phase 220-240 V 50 Hz	Three-phase 50 Hz	
ES 5/3	ES 5/3T	3	0.55	0.75	0.84	16	450	4.1	3.5	2.0
ES 5/4	ES 5/4T	4	0.75	1	1.07	20	450	5.0	3.8	2.2
ES 5/5	ES 5/5T	5	0.9	1.2	1.34	30	450	6.6	4.4	2.5
ES 5/6	ES 5/6T	6	1.1	1.5	1.55	30	450	7.4	4.7	2.7

DIMENSIONS AND WEIGHTS


Electric pump			Weight* [Kg]		Packaging [mm]		
Single-phase	Three-phase	Lt [mm]	Single-phase	Three-phase	L	B	H
ES 5/3	ES 5/3T	446	12	13.3	720	230	175
ES 5/4	ES 5/4T	470	13.5	14	720	230	175
ES 5/5	ES 5/5T	544	15.65	14.5	720	230	175
ES 5/6	ES 5/6T	568	16.15	15	720	230	175

* Electric pump weight without float switch

DIMENSIONAL DRAWINGS

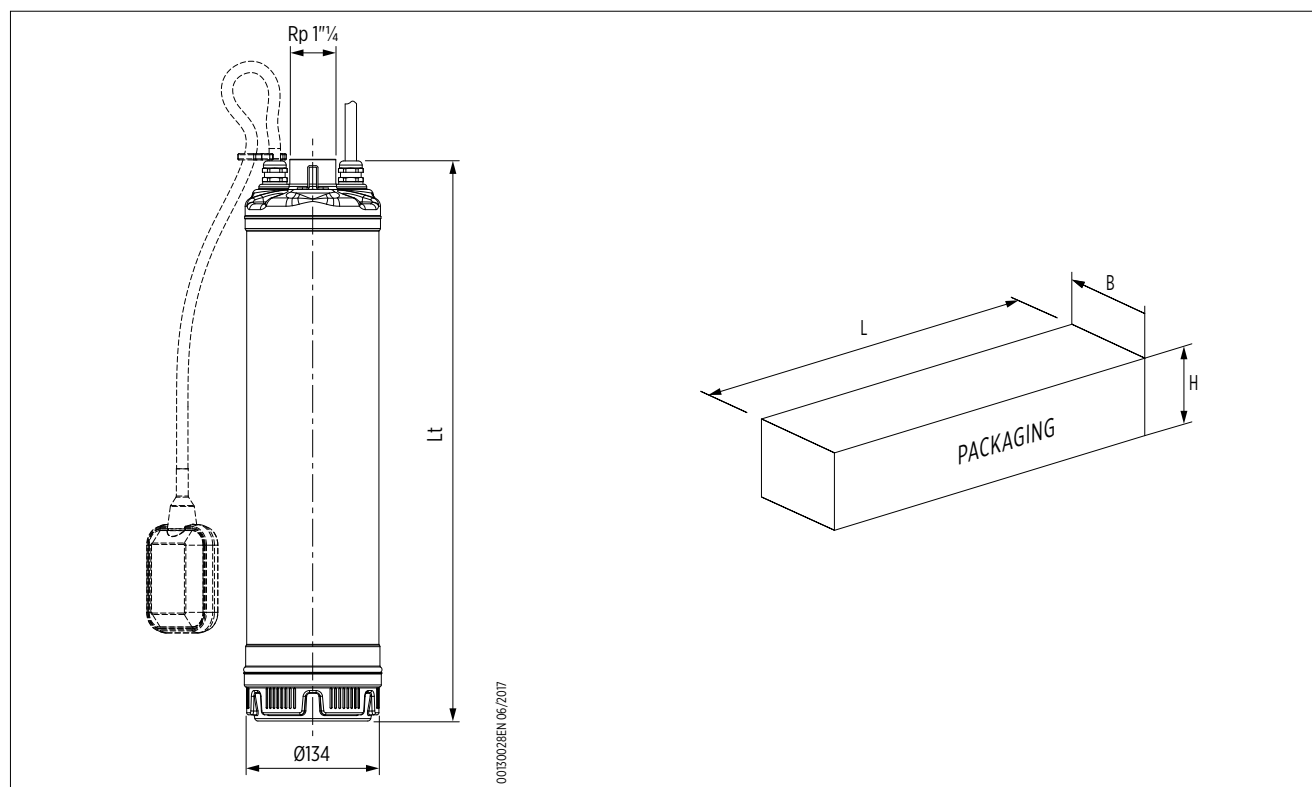

ES 5 - PERFORMANCE CURVES AT 50 HZ

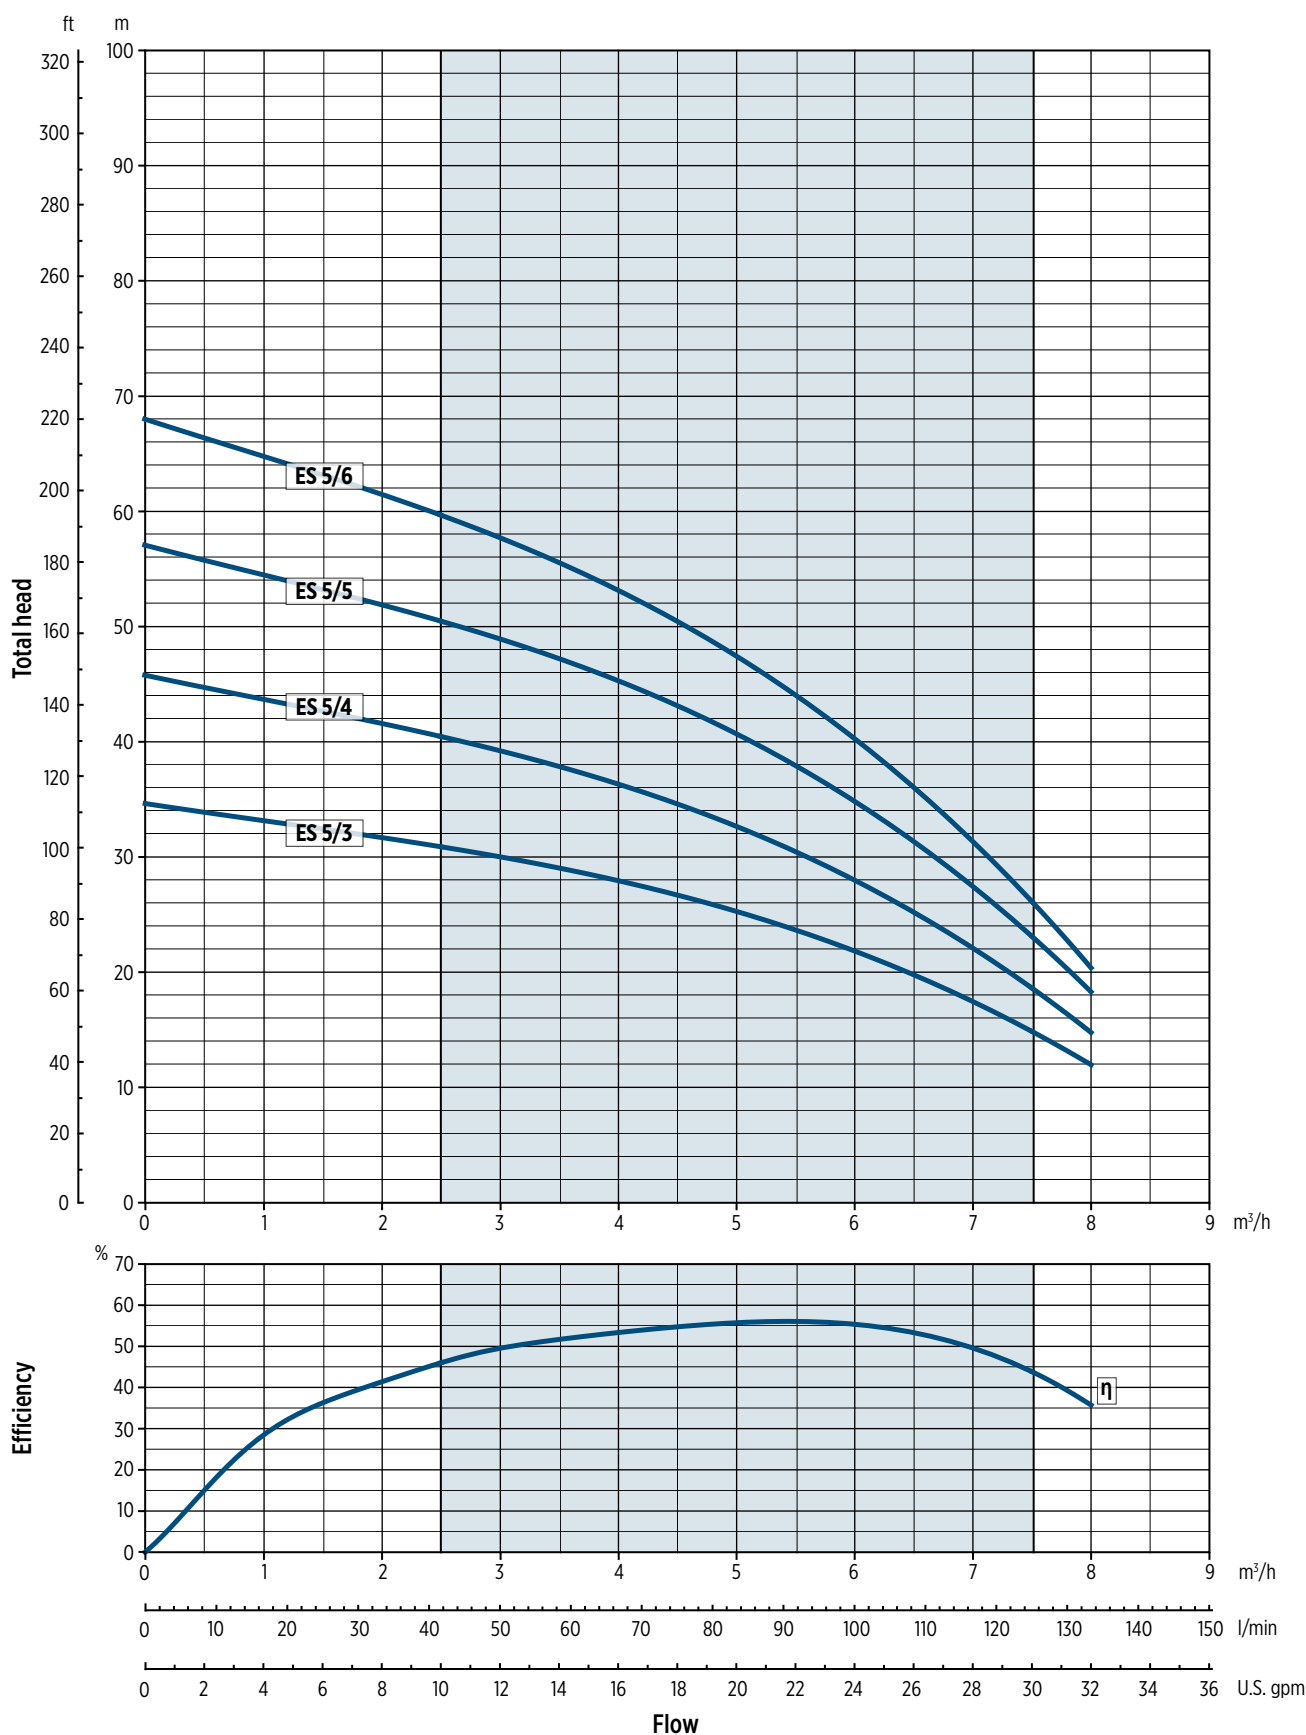



Technical data and performance curves at 60 Hz

ES 3 - 60 HZ

TECHNICAL DATA


Electric pump model		Number of stages	MOTOR POWER		INPUT POWER	Capacitor		RATED CURRENT		
Single-phase	Three-phase		[kW]	[HP]		μF	V	Single-phase 220-230 V 60 Hz	Three-phase 60 Hz	
ES 3/36	ES 3/3T6	3	0.75	1	1.05	20	450	5.2	4.2	2.4
ES 3/46	ES 3/4T6	4	0.9	1.2	1.30	20	450	6.2	4.5	2.6
ES 3/56	ES 3/5T6	5	1.1	1.5	1.61	25	450	8.0	5.2	3.0

DIMENSIONS AND WEIGHTS


Electric pump			Weight* [Kg]		Packaging [mm]		
Single-phase	Three-phase	Lt [mm]	Single-phase	Three-phase	L	B	H
ES 3/36	ES 3/3T6	496	13.25	14.2	720	230	175
ES 3/46	ES 3/4T6	520	14.7	14.7	720	230	175
ES 3/56	ES 3/5T6	544	16.35	15.2	720	230	175

* Electric pump weight without float switch

DIMENSIONAL DRAWINGS

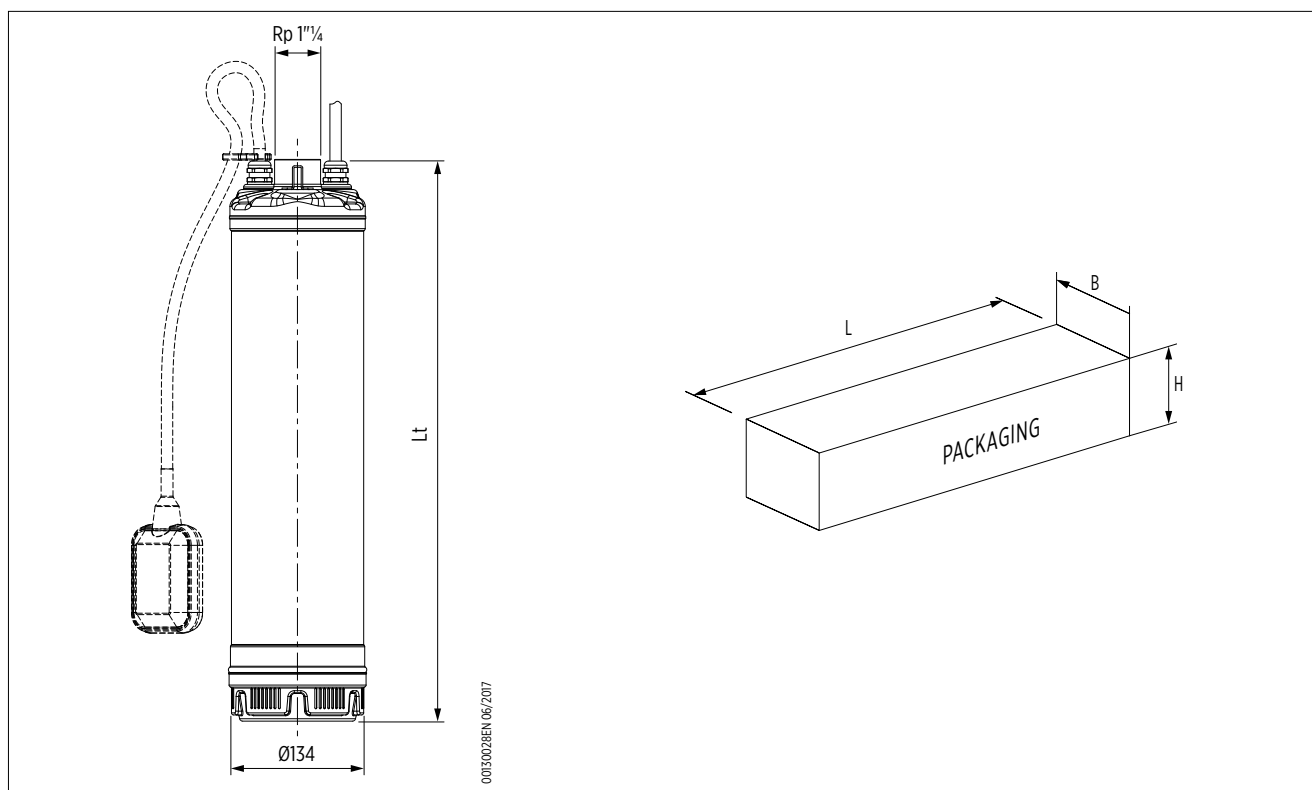

ES 3 - PERFORMANCE CURVES AT 60 HZ

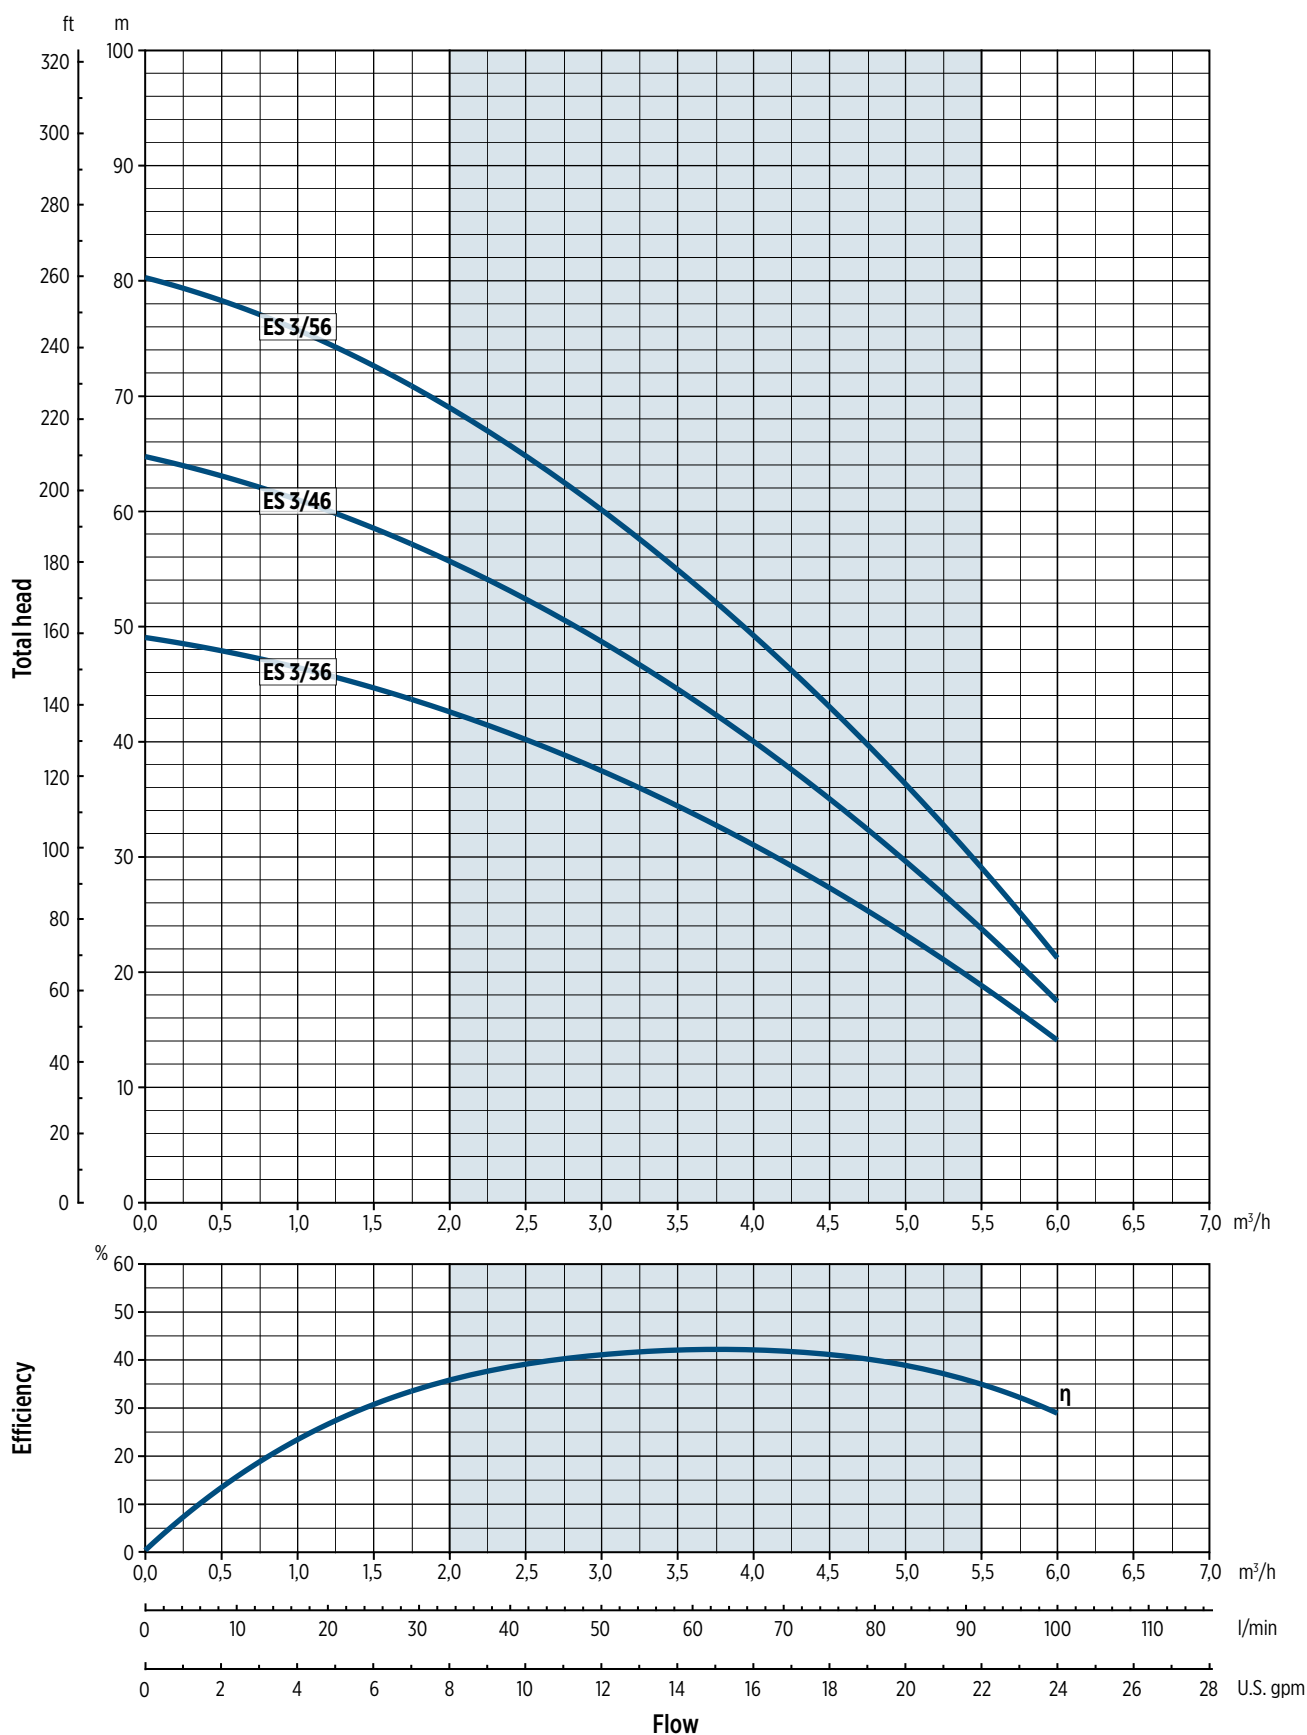

ES 5 - 60 HZ

TECHNICAL DATA


Electric pump model		Number of stages	MOTOR POWER		INPUT POWER	Capacitor		RATED CURRENT		
Single-phase	Three-phase		[kW]	[HP]		μF	V	Single-phase 220-230 V 60 Hz	Three-phase 60 Hz	
ES 5/26	ES 5/2T6	2	0.75	1	1	20	450	5.0	4.0	2.3
ES 5/36	ES 5/3T6	3	0.9	1.2	1.35	20	450	6.4	4.7	2.7
ES 5/46	ES 5/4T6	4	1.1	1.5	1.78	25	450	8.6	5.5	3.2

DIMENSIONS AND WEIGHTS


Electric pump			Weight* [Kg]		Packaging [mm]		
Single-phase	Three-phase	Lt [mm]	Single-phase	Three-phase	L	B	H
ES 5/26	ES 5/2T6	470	14	14	720	230	175
ES 5/36	ES 5/3T6	494	14.2	14.2	720	230	175
ES 5/46	ES 5/4T6	518	15.85	14.7	720	230	175

* Electric pump weight without float switch

DIMENSIONAL DRAWINGS

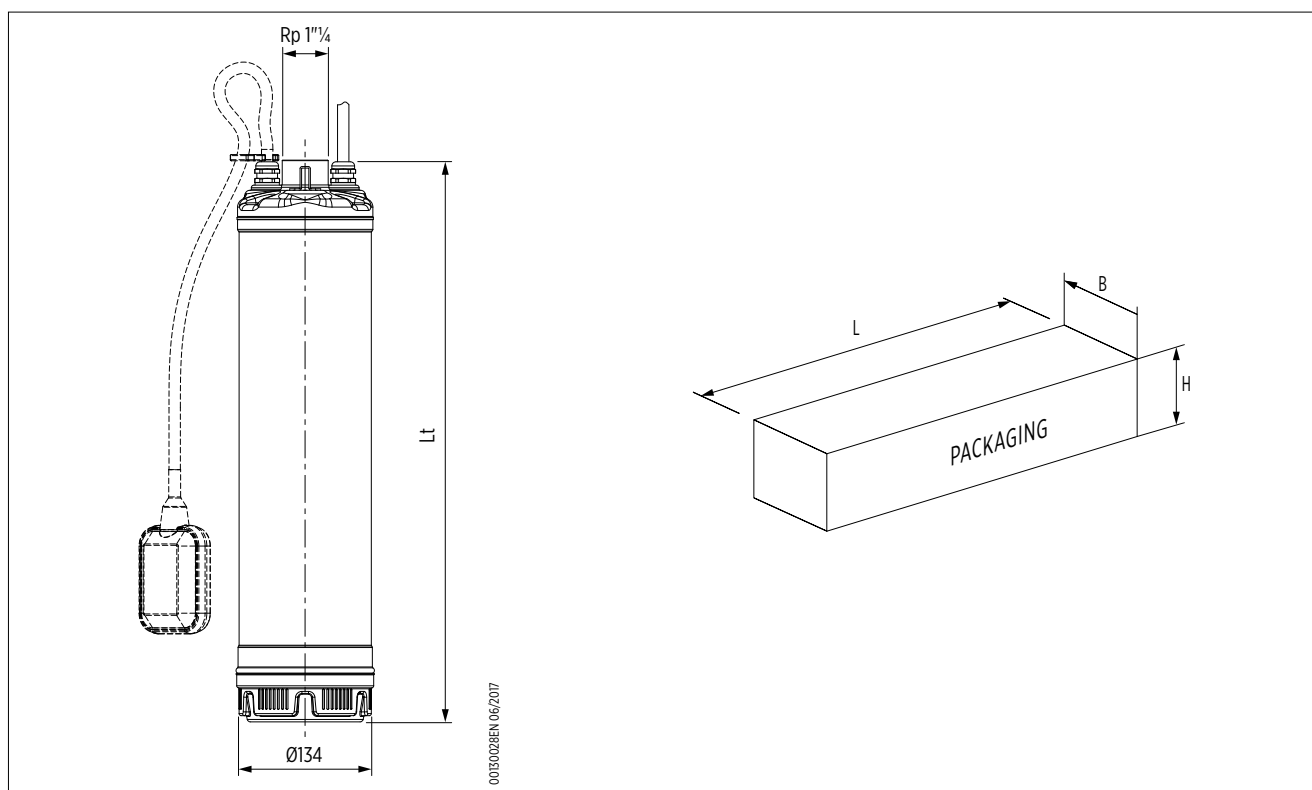

ES 5 - PERFORMANCE CURVES AT 60 HZ

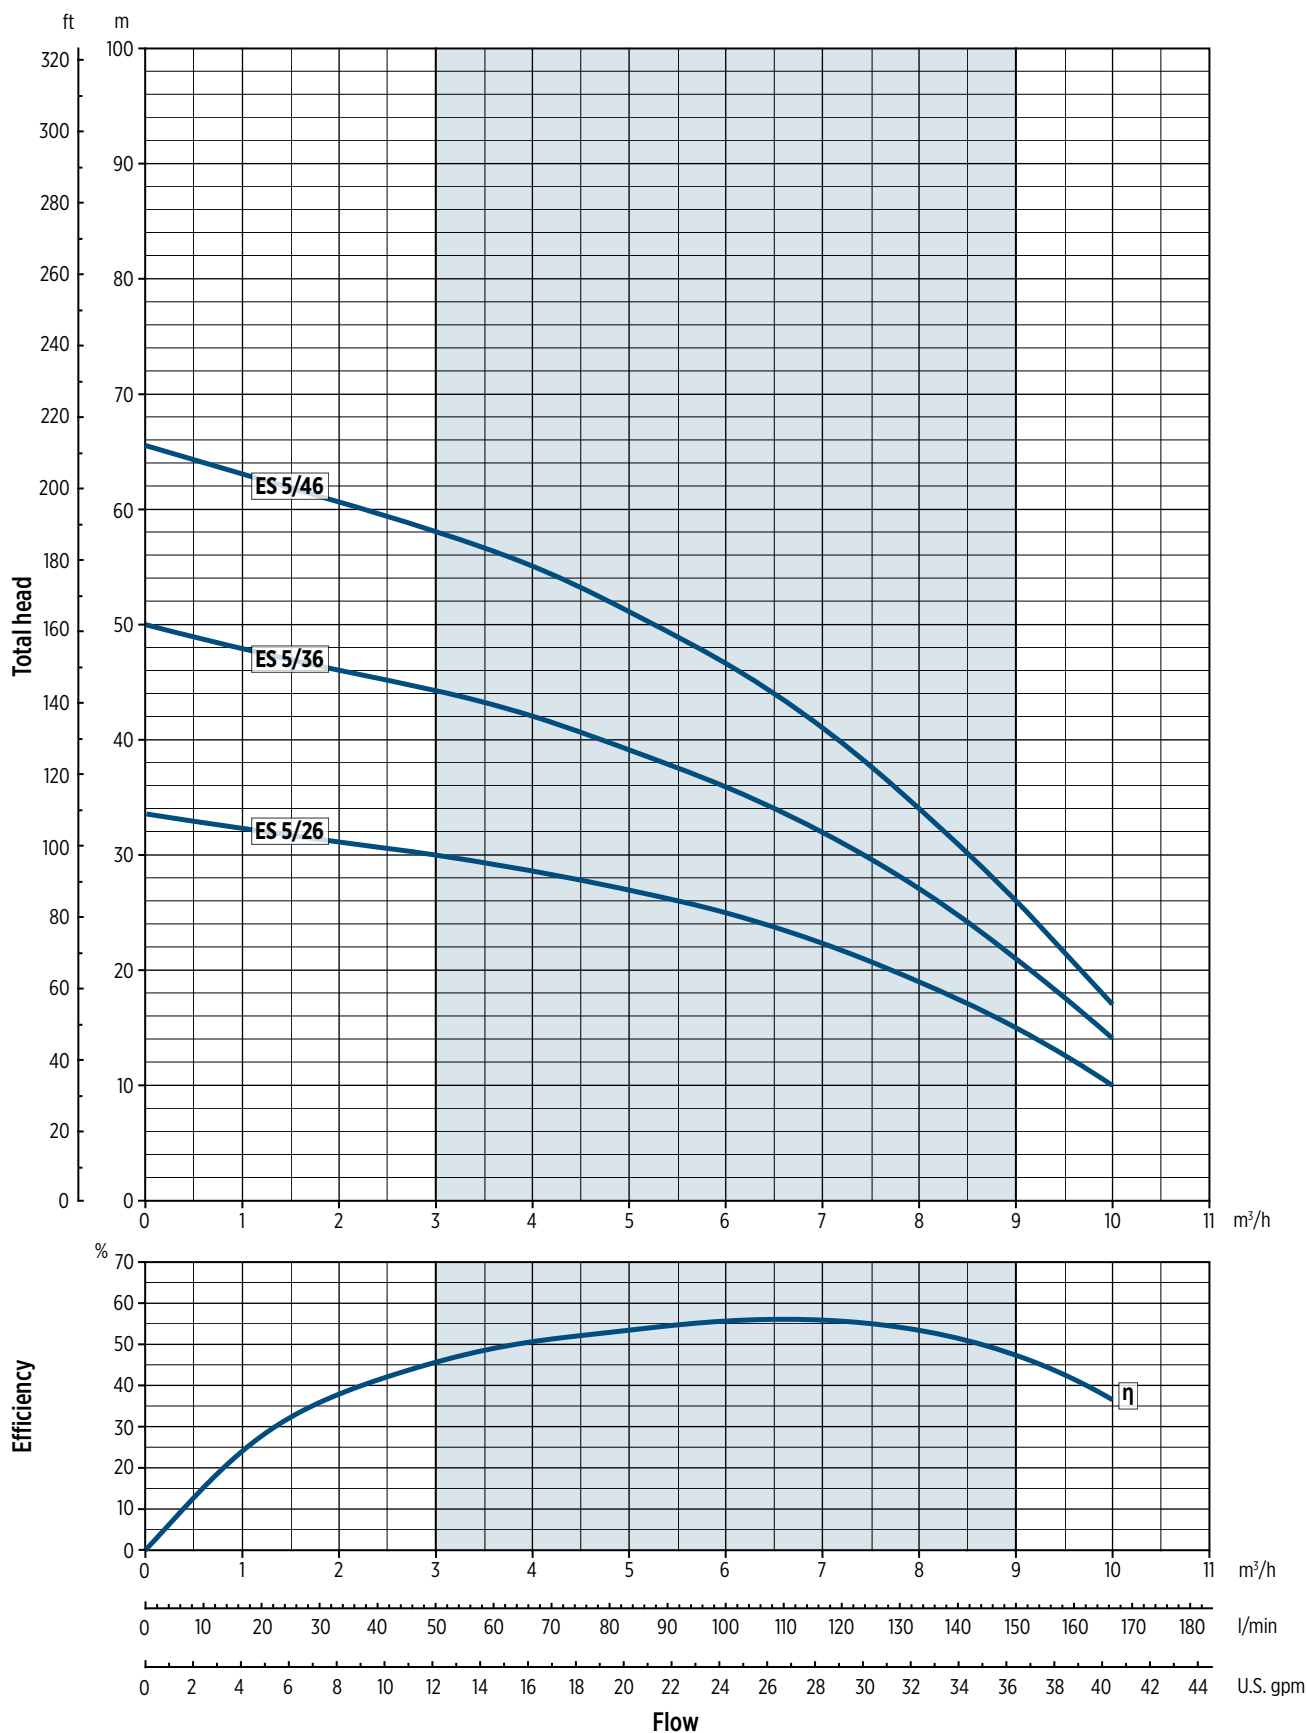

0012037 06/2019

NOTE

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.

NOTE

This image shows a full page of blank graph paper. The grid consists of thin, light gray horizontal and vertical lines that intersect to form small squares across the entire surface. There are no margins, text, or other markings on the paper.

CATALOG REVISION CHANGE NOTICE

Rev. No.	Changes	Page
02	Modification of the description of pump	2, 3
	Modification and updating of section "Materials/Fluids compatibility"	4
	Updating of "Technical and Dimensional data"	6, 8, 12, 14
03	Updating of "Available on request" section	3
	Adding of new section "Spare parts and Materials table"	5
	Adding of Three-phase 220-240 V values in "Technical data" of ES 3-5 at 50 Hz	8-9
	Modification of performance curves of "ES 3 - 50 Hz"	9
04	Updating of "Spare parts and material table"	5
05	Modification "Electric pump identification code"	4
	Updating of tables "Dimensions and weights"	8, 10, 14, 16



Franklin Electric

Franklin Electric S.r.l.
Via Asolo, 7 - 36031 Dueville (Vicenza) - ITALY
Phone: +39 0444 361114 - Fax: +39 0444 365247
Email: sales.it@fele.com

Single member - Company subject to the control and coordination of Franklin Electric Co., Inc.

Franklin Electric S.r.l. reserves the right to amend specification without prior notice

00103780 EN_REV.05_06/2019

franklinwater.eu